

Standard cleaning nozzles

Made of wear-resistant, hardened steel, provided with front jet insert and blind plug (interchangeable). Angle of jet is 30°, sturdy wall thickness, long service life and a minimum of wear and tear.

All nozzles from art. 30.038 onward are provided with ceramic inserts. Because of this, the efficiency is considerably higher compared with those nozzles with drilled holes and the service life is several times longer.

Applications

- Appropriate for removal of sludge deposits and cloggings



Standard cleaning nozzles

Standard cleaning nozzles 1/8"



	30.012NSL10	30.012NSL15	30.012NSL27	30.012NSL10F	30.012NSL15F	30.012NSL30F
	1/8 NPT					
	1 - 4					
	2.6	4	7	2.6	4	8
	4 × Ø 0.75 mm	4 × Ø 0.95 mm	4 × Ø 1.20 mm	4 × Ø 0.75 mm	4 × Ø 0.90 mm	4 × Ø 1.10 mm
	—	—	—	Ø 0.60 mm	Ø 0.60 mm	Ø 1.10 mm
	25°					
	0.5 × 0.7					
	0.02					
	5,075					
	—					

Standard cleaning nozzles 1/4"



	30.0253NSL10	30.0253NSL15	30.0253NSL30	30.0253NSL10F	30.0253NSL15F	30.0253NSL30F
	1/4 NPT					
	1.2 - 4					
	2.6	3.9	7.9	2.6	3.9	7.9
	3 × Ø 0.85 mm	3 × Ø 1.10 mm	3 × Ø 1.55 mm	3 × Ø 1.10 mm	3 × Ø 1.10 mm	3 × Ø 1.55 mm
	—	—	—	Ø 0.80 mm	Ø 0.80 mm	Ø 0.80 mm
	25°	30°				
	0.7 × 0.8					
	0.04					
	5,075					
	—					

	Connecting thread [inch]		Thrust jet		Weight [lb.]
	Application range [inch]		Front jet		Recycling
	min. gpm at 1450 psi		Jet angle backward		Maximum pressure [psi]
	Measures [inch]		Jet angle forward		

High Performance Tool **enz** golden jet®

Standard cleaning nozzles

Standard cleaning nozzles 1/4"



	30.0256NSL30	30.0256NSL40	30.0256NSL30F	30.0256NSL40F
	1/4 NPT			
	1.2 - 4.5			
	7.9	10.5	7.9	10.5
	6 × Ø 1.10 mm	6 × Ø 1.20 mm	6 × Ø 1.00 mm	6 × Ø 1.20 mm
	—	—	Ø 0.80 mm	Ø 0.80 mm
	25°			
	0.7 × 0.8			
	0.04			
	5,075			
	—			





































	35.0253NSL20	35.0253NSL30	35.0253NSL40	35.0256NSL30	35.0256NSL40
	1/4 NPT				
	1.2 - 4.5				
	5	8	10.5	8	10.5
	3 × Ø 1.10 mm	3 × Ø 1.45 mm	3 × Ø 1.10 mm	6 × Ø 1.00 mm	6 × Ø 1.15 mm
	4 × Ø 0.50 mm	4 × Ø 0.50 mm	4 × Ø 0.50 mm	4 × Ø 0.50 mm	4 × Ø 0.70 mm
	25°				
	15°				
	0.7 × 0.8				
	0.04				
	5,075				
	—				












	Connecting thread [inch]		Thrust jet		Weight [lb.]
	Application range [inch]		Front jet		Recycling
	min. gpm at 1450 psi		Jet angle backward		Maximum pressure [psi]
	Measures [inch]		Jet angle forward		

Standard cleaning nozzles

Standard cleaning nozzles 3/8" - 3/4"

						
	30.038NSL40	30.038NSL60	30.050SL40	30.050SL70	30.050SL100	35.050SL40
	3/8 NPT		1/2			
	2 - 6		2 - 8			
	10.5	16	10.5	18	26	10.5
	6 × Ø 1.30 mm	6 × Ø 1.60 mm	6 × Ø 1.20 mm	6 × Ø 1.60 mm	6 × Ø 1.90 mm	6 × Ø 1.10 mm
	*	*	—	—	—	4 × Ø 1.00 mm
	30°					
	—	—	—	—	—	15°
	1.0 × 1.5		1.2 × 1.0		1.2 × 1.8	
	0.15		0.26		0.26	
	5,075					
	—					

















						
	35.050SL70	35.050SL100	30.075SL160	30.075SL200	35.075SL160	35.075SL200
	1/2		3/4		1/2	
	2.8 - 10		2.8 - 1		2.8 - 10	
	18	26	42	52	42	53
	6 × Ø 1.40 mm	6 × Ø 1.70 mm	6 × Ø 2.45 mm	6 × Ø 2.70 mm	6 × Ø 2.20 mm	6 × Ø 2.50 mm
	4 × Ø 1.10 mm	4 × Ø 1.30 mm	*	*	4 × Ø 1.70 mm	4 × Ø 1.90 mm
	30°					
	15°	15°			15°	15°
	1.2 × 1.8		1.4 × 2.4			
	0.26	0.26	0.52	0.52	0.52	0.52
	5,075					
	—					

	Connecting thread [inch]		Thrust jet		Weight [lb.]
	Application range [inch]		Front jet		Recycling
	min. gpm at 1450 psi		Jet angle backward		Maximum pressure [psi]
	Measures [inch]		Jet angle forward	*	Optional front jet




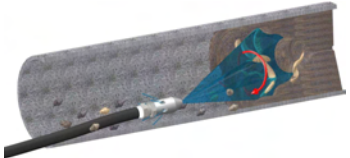











High Performance Tool 
enz  golden jet®

Standard cleaning nozzles

Standard cleaning nozzles 3/8" - 1 1/4"













						
	30.038N	30.050	30.075	30.100	30.100SP20	30.125
	3/8 NPT	1/2	3/4	1	1	1 1/4
	1.6 - 6	2 - 8	2.8 - 10	6 - 14	6 - 14	8 - 16
	2.6	13	13	32	32	53
	6 × M4	6 × M6	6 × M6	8 × M8	8 × M8	8 × M8
	1 × M4	1 × M6	1 × M6	1 × M8	1 × M8	1 × M8
	30°	30°	30°	30°	20°	30°
	—	—	—	—	—	—
	1.00 × 1.54	1.20 × 1.85	1.50 × 2.36	2.40 × 3.27	2.40 × 3.27	2.70 × 4.15
	0.15	0.26	0.50	1.60	1.60	3.05
	5,075			3,625		
	x	x	x	x	x	x

Rotodrill™ 1/2" - 1"

				
	36.050**	36.075**	36.100**	
	1/2	3/4	1	
	2 - 8	2.8 - 10	6 - 14	
	13	20	47	
	6 × M4	6 × M6	8 × M6	
	1 × 1.5	1 × 1.5	1 × 2.7	
	25°	30°	30°	
	—	—	—	
	1.26 × 2.20	1.50 × 2.36	2.16 × 3.74	
	0.38	0.74	1.92	
	5,075	5,075	3,625	
	—	—	—	

** Rotating front jet

High Performance Tool 
enz golden jet®

	Connecting thread [inch]		Thrust jet		Weight [lb.]
	Application range [inch]		Front jet		Recycling
	min. gpm at 1450 psi		Jet angle backward		Maximum pressure [psi]
	Measures [inch]		Jet angle forward		* Optional front jet